

**FASTENAL®**

**SOLUTION SELLING GUIDE**




**#1 PRO LADDER™**





# THERE'S A LADDER SOLUTION FOR EVERY JOB.

Werner is recognized for a broad product line that provides the best climbing solutions for pro users. Our commitment to safety, productivity, and quality is recognized throughout the industry. Werner remains the market leader by continually enhancing and innovating its product offering, for a wide range of applications.

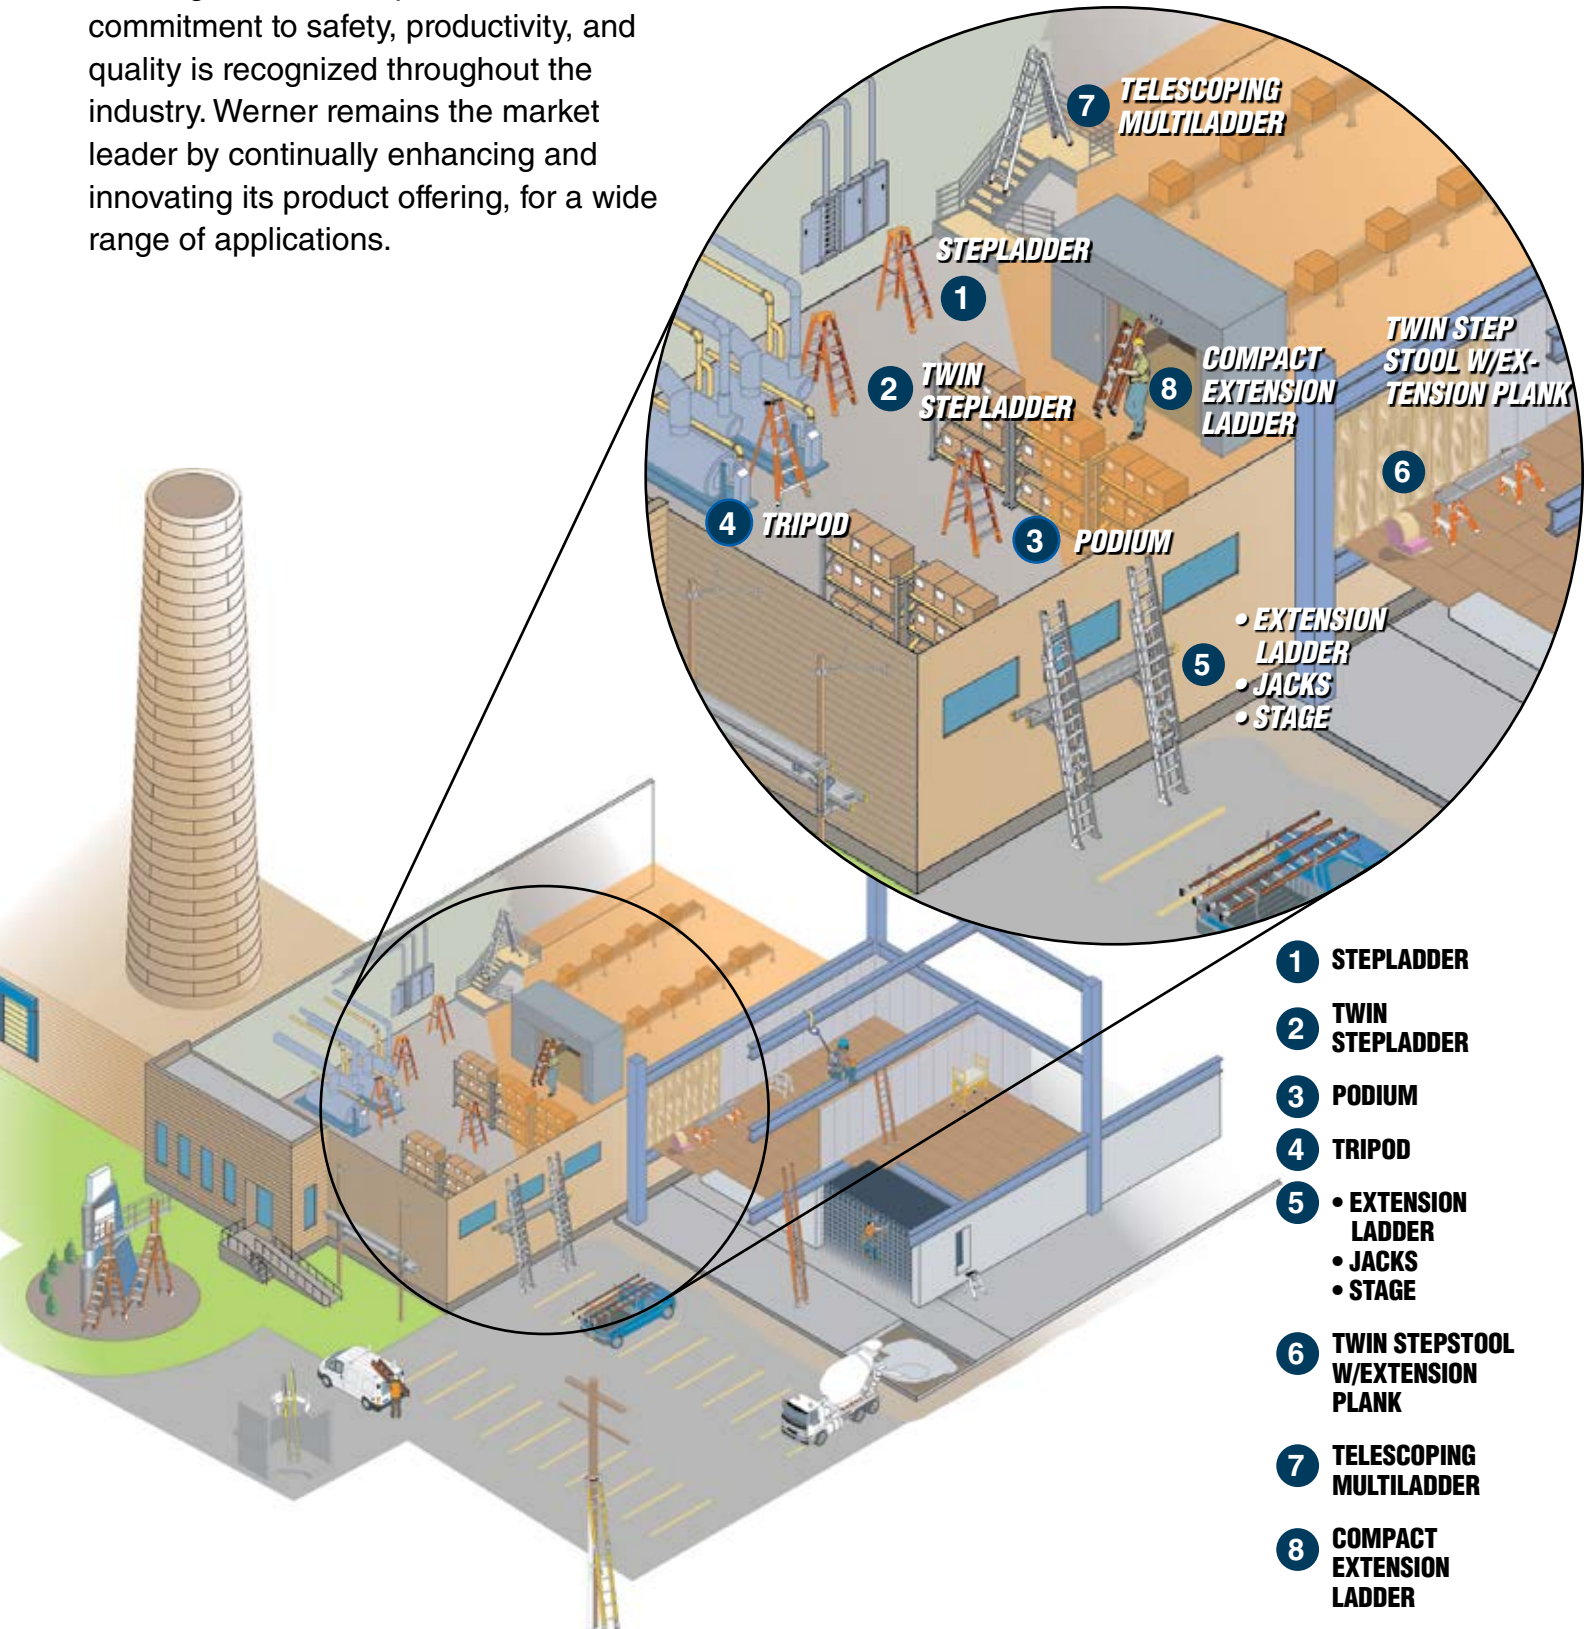



## LADDER STYLES



### 1 SINGLE-SIDED STEPLADDER

- Industry standard stepladder has now been upgraded
- Includes LOCKTOP™ and EDGE360™



### 2 TWIN STEPLADDER

- Ideal for two-person jobs
- 300lbs capacity per side
- Includes LOCKTOP™ and EDGE360™



### 3 PODIUM & PLATFORM LADDERS

- Large platform for long standing comfort
- Includes EDGE360™



### 4 TRIPOD STEPLADDER

- Ideal for tight spaces
- Use between wall studs or hard to reach places
- Stable on uneven ground




### 5 EXTENSION LADDERS

- Extends to varying lengths in one foot increments
- Access roof tops and higher elevations on construction sites
- Includes ALFLO® Rung Joints and SHU-LOK® features


## LADDER HEIGHT

### STEPLADDERS




Ladder Height	Maximum Reach
3'	7'
4'	8'
5'	9'
6'	10'
7'	11'
8'	12'
10'	14'
12'	16'

### PODIUM & PLATFORM LADDERS



Platform Height	Maximum Reach
2'	8'
4'	10'
6'	12'
8'	14'
10'	16'

### EXTENSION LADDERS



Ladder Height	Maximum Reach
16'	15'
20'	19'
24'	23'
28'	27'
32'	31'

## LDP6200 SERIES STEPLADDER

Available in 6' sizes

Type IAA, 375 lb. Duty Rating

Load capacity combined weight of user and materials



### LEANSAFE LEANING LADDER

- Designed to lean up against walls, corners and poles
- Rail latch locks legs together when in leaning mode

#### SPECIFICATIONS

Model No.	Fastenal No.	Size	Stepladder Mode		Leaning Mode	
			Max Standing Height	Max Reach Height	Max Standing Height	Max Reach Height
L6204	91222487	4'	1' 8"	8' 4"	10"	7' 3"
L6206	91222488	6'	3' 10"	10'	2' 10"	9'
L6208	91222489	8'	5' 9"	12'	4' 9"	11'
L6210	91222490	10'	7' 8"	14'	6' 8"	13'
L6212	91222491	12'	9' 7"	16'	8' 7"	15'

\*assumes a 5'6" person with a vertical 12" reach

## LDP6200 SERIES STEPLADDER

Available in 6' sizes

Type IAA, 375 lb. Duty Rating

Load capacity combined weight of user and materials



### LEANSAFE X3 LEANING LADDER

- Seamlessly go from step to straight ladder in one adjustment
- All in one top, no adjustment needed
- Non-marring rubber top protects work surfaces

#### SPECIFICATIONS

Model No.	Fastenal No.	Stepladder Height	Stepladder Reach	Straight Ladder Height	Straight Ladder Reach	Approx. Product Length	Approx. Product Width
LSX3		6'	10'	9'	13'	72.5"	24"

#### DIMENSIONS

Top:	16" x 19.5"	Rear Rails:	2-1/2"
Front Rails:	3-1/8" wide	Rear Flange:	1"
Front Flange:	1-1/4" wide	Steps:	3" Trapezoidal

# 6200SERIES STEPLADDER

Available in 3', 4', 5', 6', 7', 8', 10' and 12' sizes

Type IA, 300 lb. Duty Rating

Load capacity combined weight of user and materials



**ELECTRICAL**



**MECHANICAL**



**RESIDENTIAL**

## Ideal ladder for multiple application needs



Customize your ladder top with multiple accessories




**LOCKTOP™**

4 rivets attach top to each front rail

Back-up plates reinforce all top connectors



Full set of rear horizontals spaced one per foot



All steps and two rear horizontals\* are knee-braced



Heavy duty internal spreaders connected with solid rivets



Double riveted, slip-resistant Traction-Tred® steps



Seven layer fiberglass construction



Wider stance for stability



Model 6206

## 6200SERIES STEPLADDER

Model No.	Fastenal No.	Size	Approx. Width	Approx. Spread	Approx. Shipping Wt. Lbs.
6203	2113556	3'	18-1/8"	23-1/8"	13.0
6204	2113467	4'	19-7/8"	29"	16.0
6205	2113468	5'	21-5/8"	35-1/8"	19.0
6206	2113469	6'	23-3/8"	41-1/4"	22.0
6207	2113470	7'	25-1/8"	47-1/2"	26.0
6208	2113471	8'	26-7/8"	53-5/8"	30.0
6210	2113472	10'	30-3/8"	65-7/8"	39.0
6212	2113473	12'	33-7/8"	78-1/4"	48.0



# T6200 SERIES TWIN STEPLADDER


Type IA, 300 lb. Duty Rating **per side**

Available in 3', 4', 5', 6', 8', 10' and 12' sizes

Load capacity per side combined weight of user and materials



**Twin Stepladders allow for 2 people working together and are convenient when working in concentrated spaces. Duty rating applies to each side.**

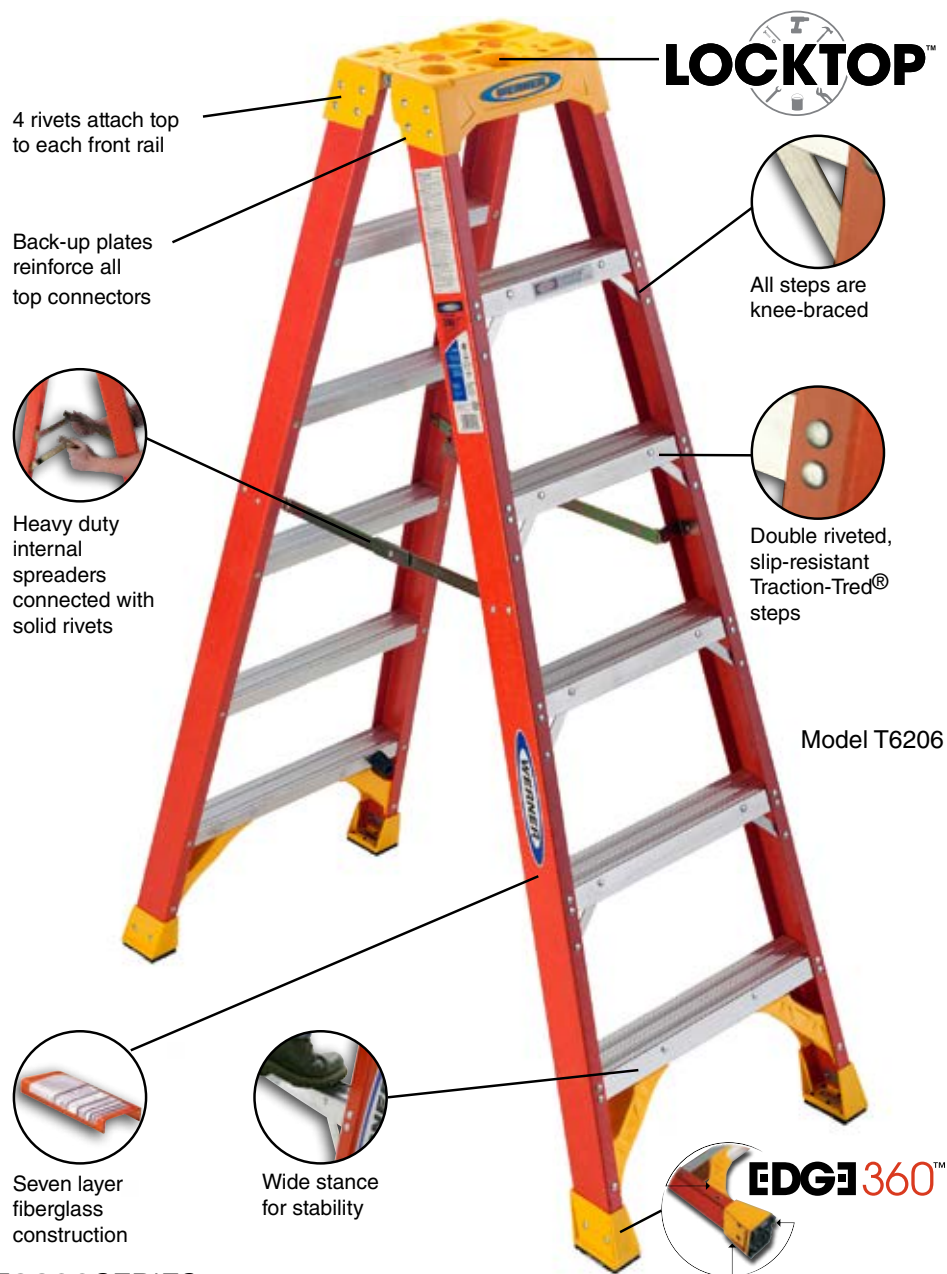

## T6200 SERIES TWIN STEPLADDER

Model No.	Fastenal No.	Size	Approx. Width	Approx. Spread	Approx. Shipping Wt. Lbs.
T6203	99298977	3'	18-1/8"	29"	16.0
T6204	2113541	4'	19-7/8"	36-1/8"	19.0
T6205	2113542	5'	21-5/8"	43-1/8"	23.0
T6206	2113543	6'	23-3/8"	50-1/8"	27.0
T6208	99298978	8'	26-7/8"	64-1/8"	37.0
T6210	2113544	10'	30-3/8"	78-1/8"	54.5
T6212	2113545	12'	33-7/8"	92-1/8"	68.5

# PD6200 SERIES PODIUM LADDER Type IA, 300 lb. Duty Rating

# PD7300 SERIES PODIUM LADDER Type IAA, 375 lb. Duty Rating

Load capacity  
combined  
weight of user  
and materials



**GENERAL**



**ELECTRICAL**



**FINISHING**

*The Podium Ladder is ideal for working at fixed heights, reaching all directions, and provides secure feel with wrap-around waist high guard rail.*



Model  
PD7304



Model  
PD6204-4C

## PD6200 SERIES PODIUM LADDER without CASTERS

Model No.	Fastenal No.	Duty Rating	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Shipping Wt. Lbs.
PD6203	2113513	300 lbs.	3'	6'	26"	36"	21.0
PD6204	99862034	300 lbs.	4'	7'	27"	43"	26.5
PD6206	2113515	300 lbs.	6'	9'	31"	55"	32.5
PD6208	2113516	300 lbs.	8'	11'	34"	67"	44.5
PD6210	2113517	300 lbs.	10'	13'	38"	80"	55.5

## PD7300 SERIES PODIUM LADDER without CASTERS

Model No.	Fastenal No.	Duty Rating	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Shipping Wt. Lbs.
PD7302	X	375 Lb.	2'	X	24"	31"	20.0
PD7303	2113518	375 Lb.	3'	6'	26"	36"	21.0
PD7304	2113519	375 Lb.	4'	7'	27"	43"	26.5
PD7305	X	375 Lb.	5'	X	29"	50"	32.5
PD7306	2113520	375 Lb.	6'	9'	31"	56"	38.5
PD7307	X	375 Lb.	7'	X	33"	62"	38.0
PD7308	2113521	375 Lb.	8'	11'	34"	68"	45.5
PD7310	X	375 Lb.	10'	X	38"	81"	60.0
PD7312	X	375 Lb.	12'	X	41"	93"	66.5

## PD6200-4C SERIES PODIUM LADDER with CASTERS

Model No.	Fastenal No.	Duty Rating	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Shipping Wt. Lbs.
PD6203-4C	99862033	300 Lb.	3'	6'	26"	36"	28.5
PD6204-4C	99862034	300 Lb.	4'	7'	27"	43"	33.5
PD6206-4C	99862035	300 Lb.	6'	9'	31"	55"	45.5
PD6208-4C	99862036	300 Lb.	8'	11'	34"	67"	52.5
PD6210-4C	99862037	300 Lb.	10'	13'	38"	80"	62.5

## PD7300-4C SERIES PODIUM LADDER with CASTERS

Model No.	Fastenal No.	Duty Rating	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Shipping Wt. Lbs.
PD7303-4C	99862029	375 Lb.	3'	6'	26"	36"	28.5
PD7304-4C	99862030	375 Lb.	4'	7'	27"	43"	33.5
PD7306-4C	99862031	375 Lb.	6'	9'	31"	55"	45.5
PD7308-4C	99862032	375 Lb.	8'	11'	34"	67"	52.5



# FTPSERIES TRIPOD STEPLADDER

Type IA, 300 lb. Duty Rating

Available in 4', 6', 8', 10' and 12' sizes

Load capacity combined weight of user and materials


***The Tripod Stepladder provides ease of access to your work environment, with back rail maneuverability to fit through studs, into tight areas, around corners and uneven surfaces***




**RESIDENTIAL**



**INDUSTRIAL**

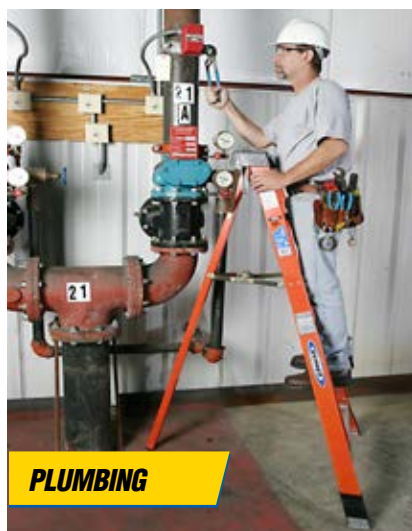

**PLUMBING**

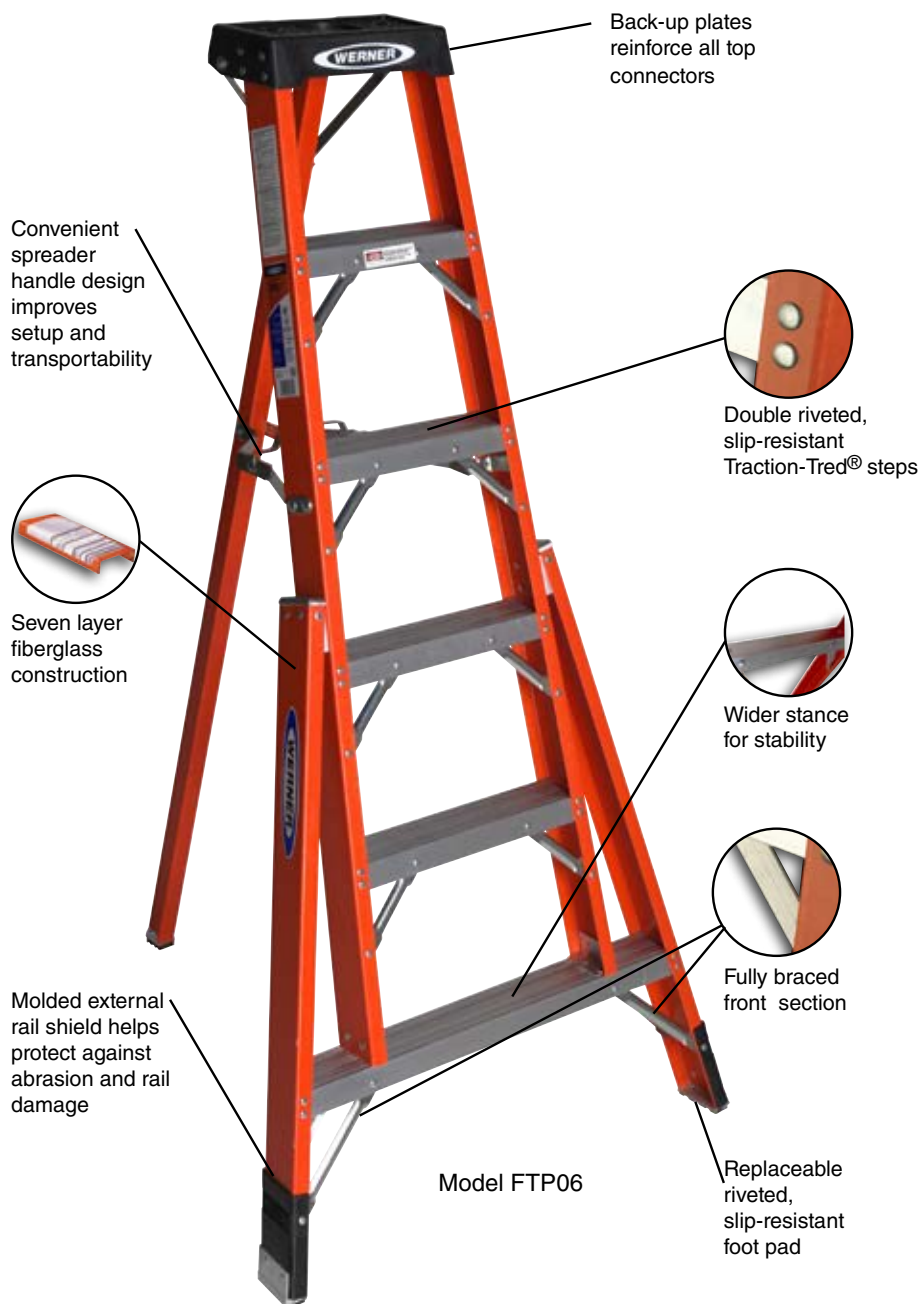

Model FTP06

## FTPSERIES TRIPOD STEPLADDER

Model No.	Fastenal No.	Size	Approx. Width	Approx. Spread	Approx. Shipping Wt. Lbs.
FTP6204	2113646	4'	31"	30-1/2"	17.0
FTP6206	99298846	6'	36"	43-3/4"	23.0
FTP6208	99298913	8'	40"	57"	31.0
FTP6210	99298914	10'	51"	71"	42.0
FTP6212	2113647	12'	54"	77-3/4"	51.0



# OBELOO SERIES ELECTRICIAN'S JOBSTATION

Type IAA, 375 lb. Duty Rating

Available in 4', 6', 8', 10' and 12' sizes

Load capacity combined weight of user and materials



- Customized HolsterTop™ secures tools from falling
- Convenient conduit cutting system (not available on the 4 foot model)
- Built-In wire spool holders for both large and small spools
- Rugged professional grade bracing



## OBELOO SERIES ELECTRICIAN'S JOBSTATION


Model No.	Fastenal No.	Size	Approx. Width	Approx. Spread	Approx. Shipping Wt. Lbs.
OBEL04	2113497	4'	19-7/8"	29"	16.0
OBEL06	99298930	6'	23-3/8"	41-1/4"	24.0
OBEL08	2113498	8'	26-7/8"	53-5/8"	32.0
OBEL10	99298931	10'	30-3/8"	65-7/8"	41.0
OBEL12	2113499	12'	33-7/8"	78-1/4"	51.5

# MT SERIES TELESCOPING MULTILADDER

Type IA, 300 lb. Duty Rating  
per side

Available in 3'-5', 4'-7', 5'-9' and 6'-11' stepladder sizes

Load capacity per side combined weight of user and materials

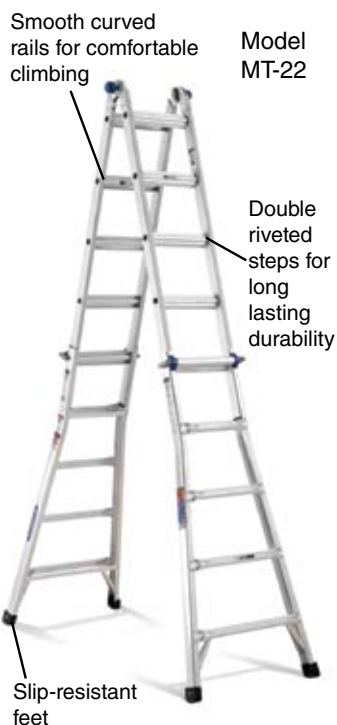

**POSITION #1**  
Twin Stepladder



**POSITION #2**  
Stairway Stepladder



**POSITION #3**  
Extension Ladder



**POSITION #4**  
Self-Supporting  
2-Scaffold

## MT SERIES TELESCOPING MULTILADDER

Model No.	Fastenal No.	Stepladder Height	Extension Height	Stair Height	Scaffold Length	Approx. Shipping Wt. Lbs.
MT-13	99298927	3' to 5'	7' to 11'	3' to 5'	1' to 2'	31.5
MT-17	99298928	4' to 7'	9' to 15'	4' to 7'	1' to 3'	39.5
MT-22	99298929	5' to 9'	11' to 19'	5' to 9'	1' to 4'	47.0
MT-26	2113551	6' to 11'	13' to 23'	6' to 11'	1' to 5'	62.6

# D6200-2SERIES EXTENSION LADDER

Available in 16', 20', 24', 28', 32' and 40' sizes

Type IA, 300 lb. Duty Rating

Load capacity combined weight of user and materials




**2ND LEVEL ACCESS**



**OPTIONAL LEVELER PRODUCT FOR UNEVEN SURFACES. MODEL: D7100-2LV**

## D6200-2SERIES EXTENSION LADDER

Model No.	Fastenal No.	Total Length of Sections	Max. Working Length	Approx. Shipping Wt. Lbs.
D6216-2	99298899	16'	13'	36.5
D6220-2	2113605	20'	17'	44.5
D6224-2	99298901	24'	21'	52.0
D6228-2	99298902	28'	25'	59.5
D6232-2	99558999	32'	29'	71.5
D6240-2	99298903	40'	35'	88.5

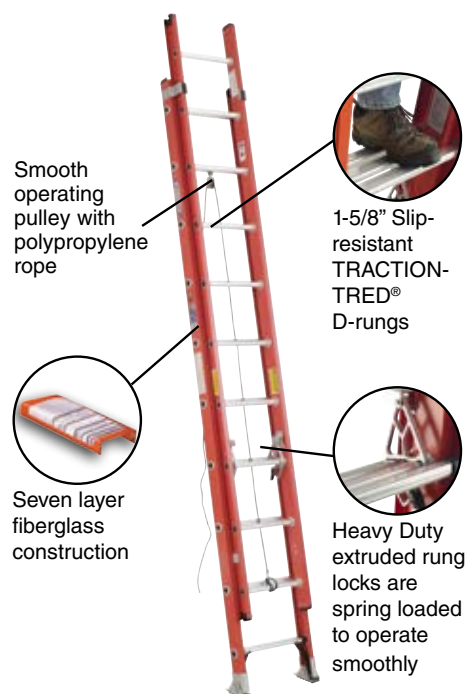

# D6200-3SERIES COMPACT EXTENSION LADDER

Available in 16', 20', 24', 28', and 32' sizes


Type IA, 300 lb. Duty Rating

Load capacity combined weight of user and materials



**COMPACT**

- Innovative 3-section design allows for:
- Storing convenience and maneuverability
  - Ease of transport on compact vehicles
  - Versatility - use indoors or outdoors

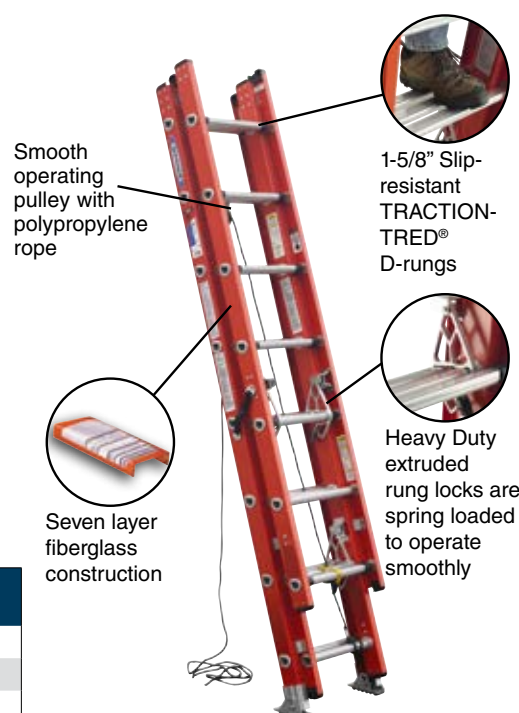


## D6200-3SERIES EXTENSION LADDER

Model No.	Fastenal No.	Total Length of Sections	Max. Working Length	Approx. Shipping Wt. Lbs.
D6216-3	2113604	18'	13'	40.5
D6220-3	2113606	23'	17'	54.0
D6224-3	2113607	27'	21'	61.0
D6228-3	2113608	31'	25'	74.5
D6232-3	2113609	35'	29'	81.0



# WALKTHRU™

## EXTENSION LADDER SAFETY ACCESSORY

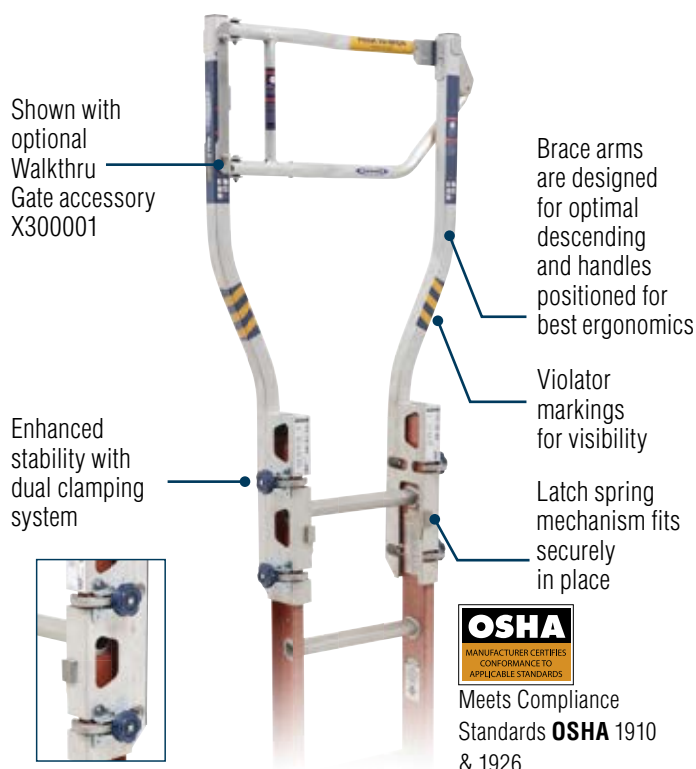

- Provides ergonomic transition area from ladder to roof, eliminating the need to step around the ladder
- Wide base provides additional contact area on the worksurface making a safer transition to and from the access point
- Spring closed gate accessory also available
- Easy to install and uninstall

LADDER*	DUTY RATING	
<b>Type IAA</b>	Special Duty	375 lbs
<b>Type IA</b>	Extra Heavy Duty	300 lbs
<b>Type I</b>	Heavy Duty	250 lbs
<b>Type II</b>	Standard	225 lbs

Model No.	Fastenal No.	Item Name	Shipping Height	Shipping Length	Shipping Width	Shipping Weight	Product Weight
X300000	X	Extension Ladder WalkThru	7.1 in	51 in	9.75 in	11 lbs	10.5 lbs
X300001	X	Extension Ladder WalkThru Gate	3.75 in	30.7 in	14.17 in	4 lbs	4 lbs


\*Not compatible with 7800, 500-1,500-3,7100-1(manhole ladders only), 9500-1,9500-2, D1300-2 & D1800-2EQ series ladders.

## T6200-2GSSERIES EXTENSION LADDER

Available in 20', 24', 28', 32', 36', 40' sizes

Type IA, 300 lb. Duty Rating

*Load capacity combined weight of user and materials*

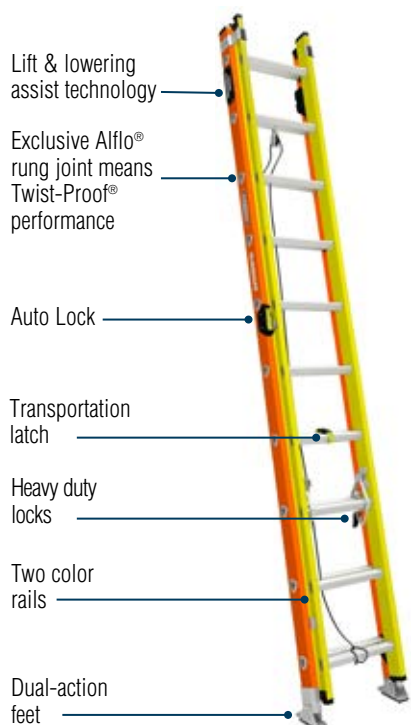

## GLIDESAFE™

### EASY OPERATING EXTENSION LADDER

- Lift-assist technology makes it easier to extend with up to 50% less force†, eliminating back and arm strain
- Built in lowering assist technology guarantees a smooth closing, preventing slamming and rope burns
- The dual-locking system ensures the ladder won't extend while on the go, providing peace of mind

### SPECIFICATIONS

Model No.	Fastenal No.	Ladder Size	Ladder Length	Reach Height†	Ladder Weight	Rung Type	Shipping Length	Shipping Width	Shipping Height
T6220-2GS	923230174	20'	17'	19'	44.5 lbs	Tri-Rung	120"	19"	6.9"
T6224-2GS	923230173	24'	21'	23'	52.0 lbs	Tri-Rung	144"	19"	6.9"
T6228-2GS	923230170	28'	25'	27'	59.5 lbs	Tri-Rung	168"	19"	6.9"
T6232-2GS	923230172	32'	29'	31'	71.5 lbs	Tri-Rung	192"	19"	6.9"
T6236-2GS	923230171	36'	32'	34'	84.5 lbs	Tri-Rung	216"	19"	6.9"
T6240-2GS	923230175	40'	35'	37'	92.5 lbs	Tri-Rung	240"	19"	6.9"

† Percentage of assist can vary by ladder size, friction between siderails and variation on lift assist technology, compared to Werner D6200 300lbs fiberglass extension ladders

‡ Assumes a 5ft 7in person with a vertical 12in reach



U.S. HEADQUARTERS  
Werner Co.  
555 Pierce Rd., STE 300  
Itasca, IL 60143

To contact us, please visit:  
[WERNERCO.COM](http://WERNERCO.COM)